

OfficeRunner II Manual

Wireless headset and base station — setup, wearing, calls and conferences

CONTENTS

Setting up

Sections 1–11

Everyday calls

Sections 17–22

Wearing the headset


Sections 12–16

Conferences & extras


Sections 23–26

SETTING UP


1. Package contents

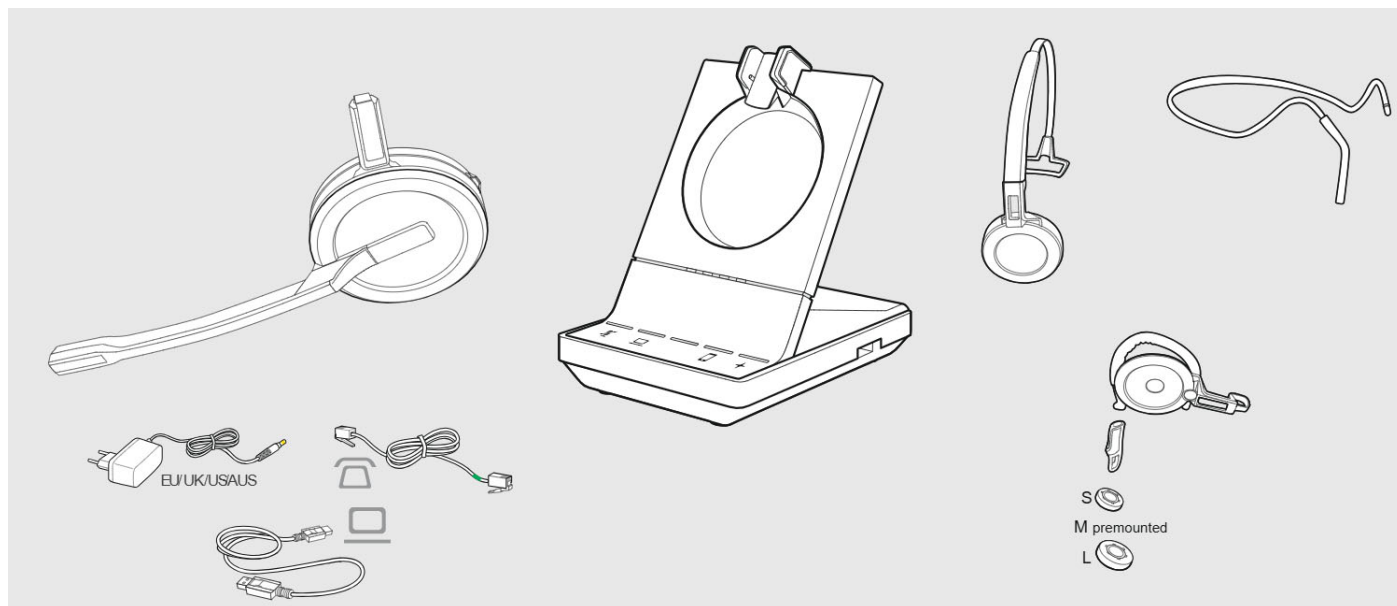


2. Pairing and charging the headset before first use

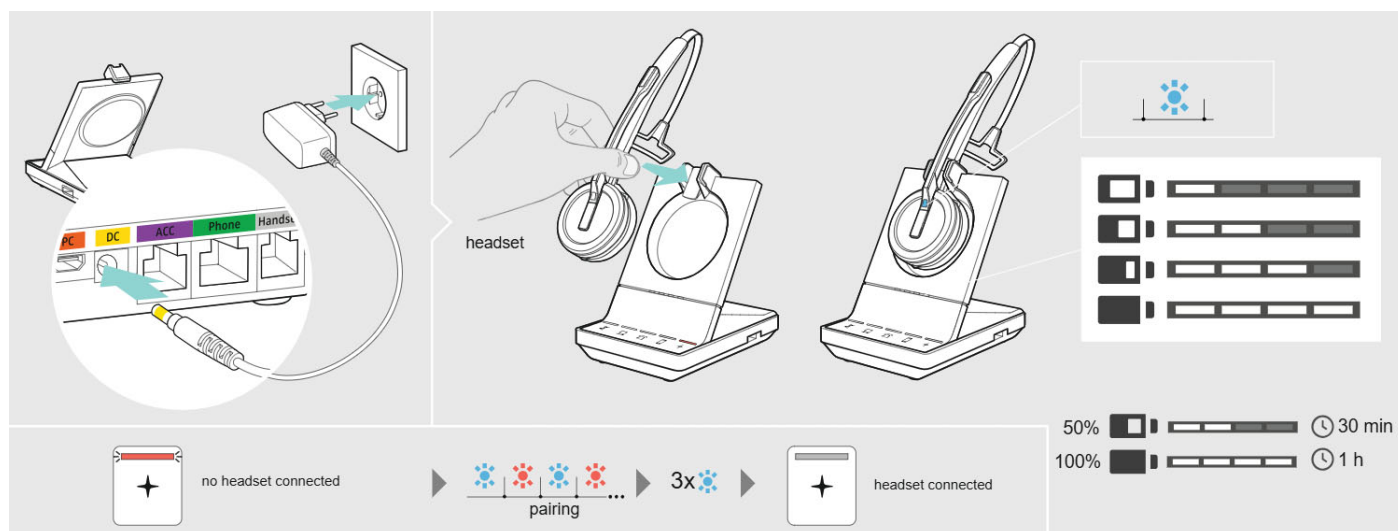


3. Phone without a headset port

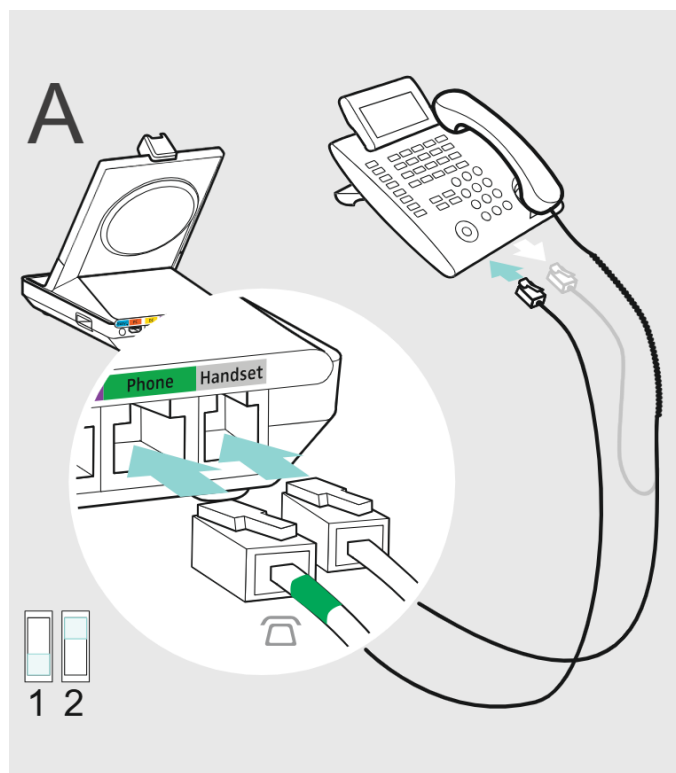


4. Phone with a headset port

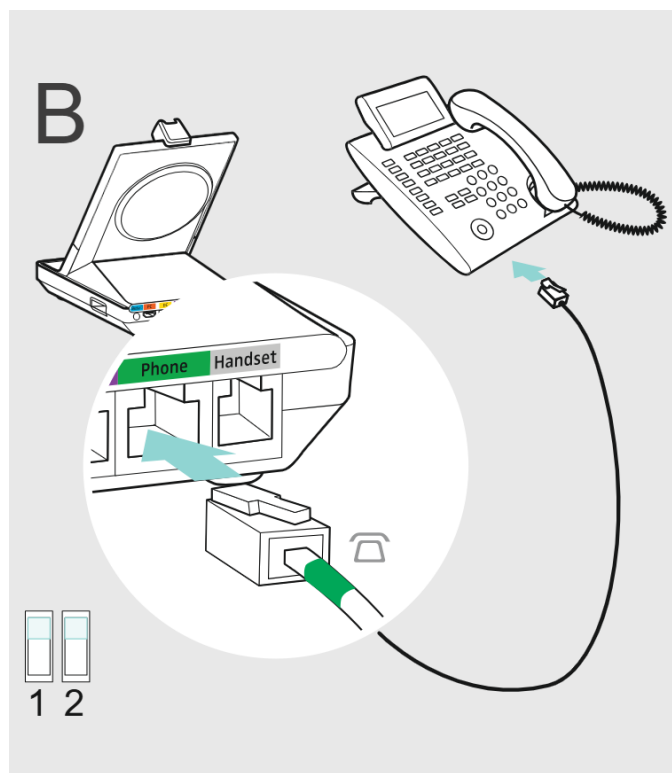


5. Handset lifter

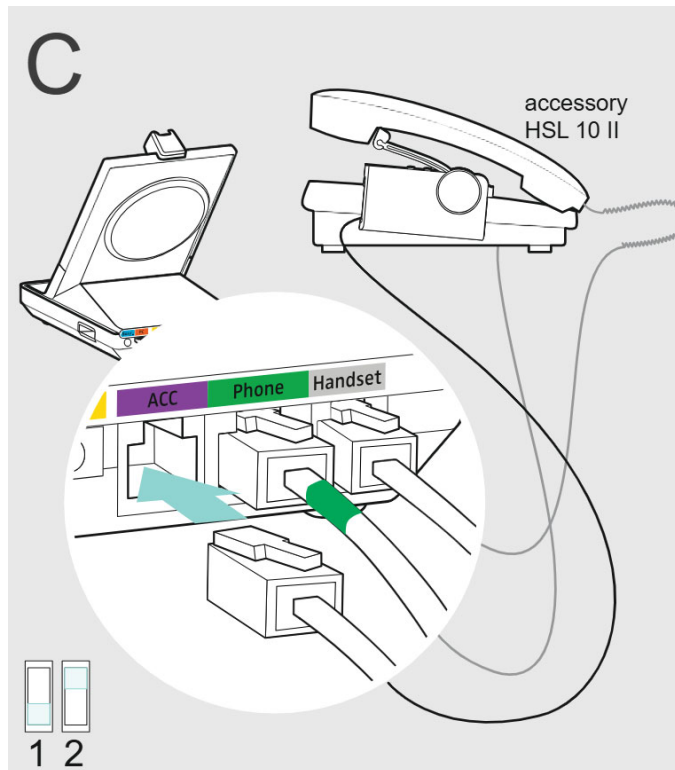

6. Electronic hook switch (EHS)

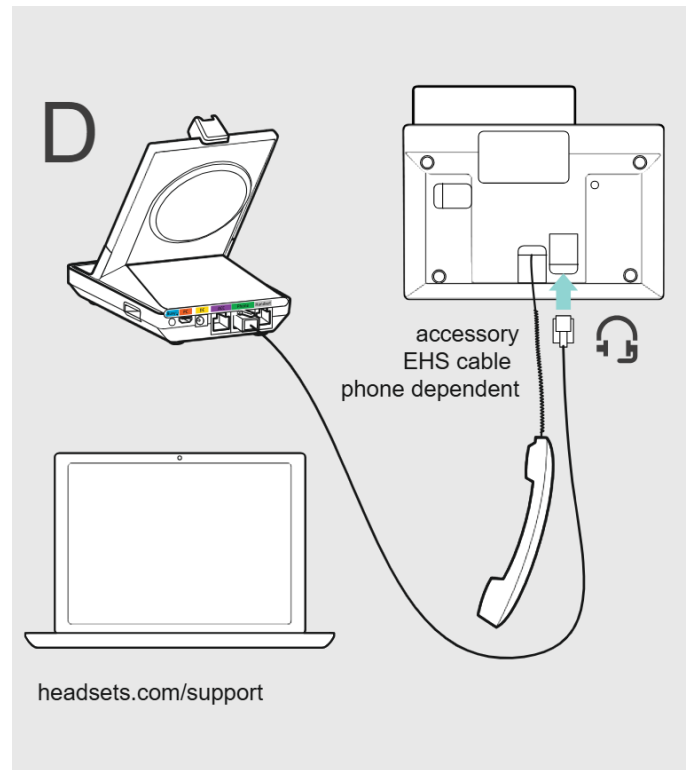


7. Phone compatibility switch (A–C)

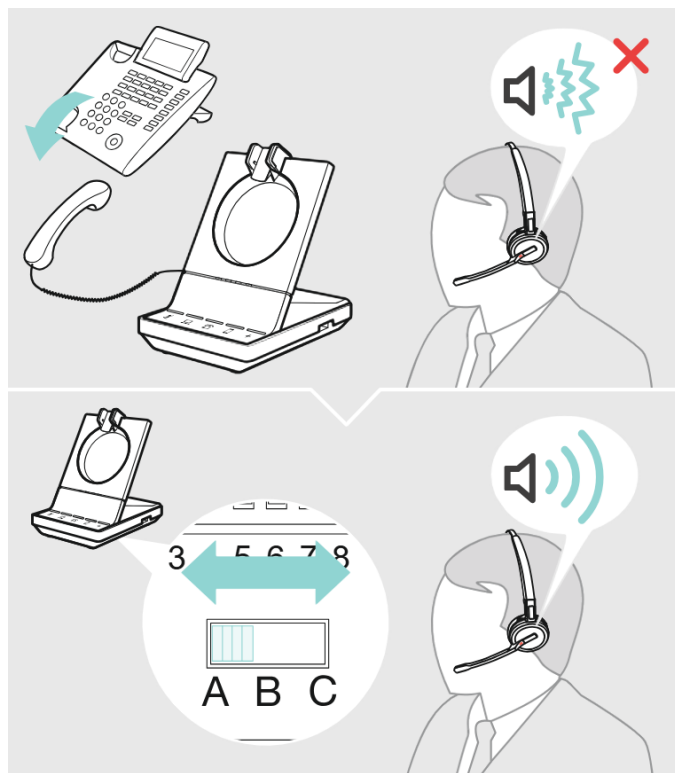


Sets desk-phone compatibility, not volume. Try each position until you hear a clear dial tone.

8. Microphone sensitivity

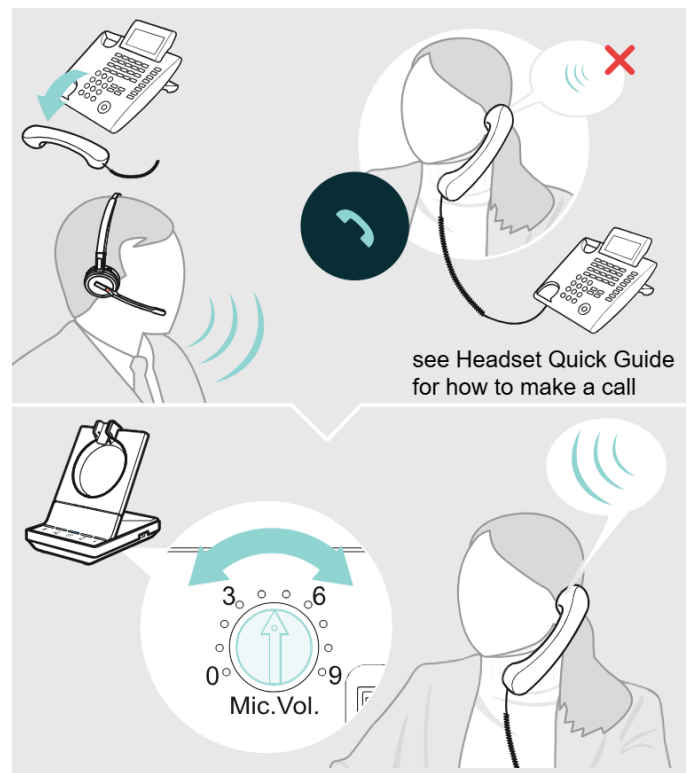


Sets how loud you sound to the other person — this is not your listening volume.


9. Connecting the base station to a PC

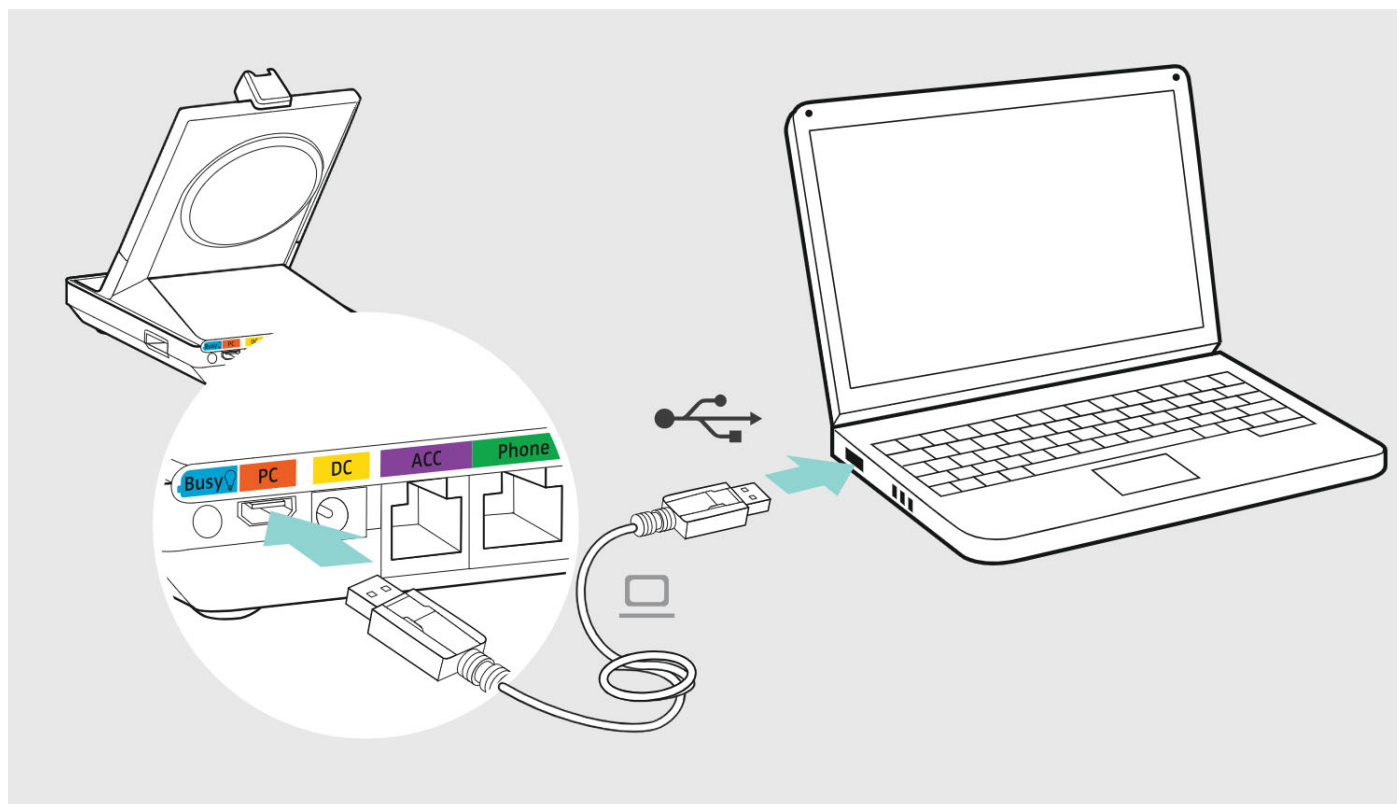

10. Automatic link establishment

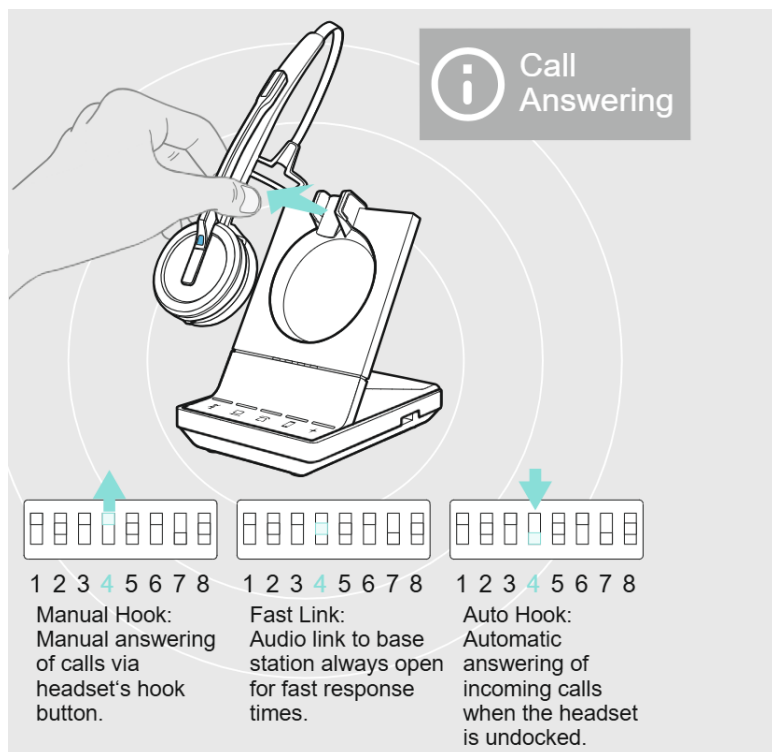

11. Adjusting the headset system with the DIP switches

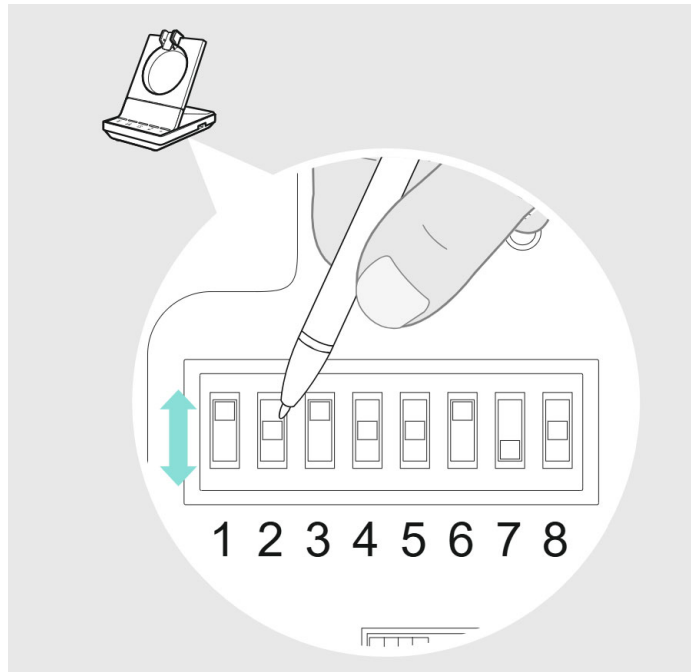

DIP 1 & 2 Desk Phone Mode

- | | |
|---|---|
| ☐ DHSG mode
Call control with
phones using DHSG
standard | ☐ Panasonic mode
Call control with
Panasonic phones |
| ☐ Manual mode
Manual operation of
handset or handset
lifter | ☐ Auto link
Wireless link between
headset and base
station established
automatically |
| ☐ OptiPoint mode
Call control with
OptiPoint phones | ☐ MSH mode
Call control with
phones using MSH
standard |

No assigned modes

- ☐ 1 & ☐ 2 & ☐ 1 & ☐ 2 & ☐ 1 & ☐ 2

DIP 3: Radio range

- ☐ Long range
Up to 100 m indoors
- ☐ Medium Range
Up to 50 m indoors
- ☐ Short range
Up to 10 m indoors; for minimal interference with other DECT devices in dense environments

DIP 4: Call Answering

- ☐ Manual Hook
Manual answering of calls via hook button on headset
- ☐ Open Audio Link
Audio link to base station always open for fast response times
- ☐ Auto Hook
Automatic answering of incoming calls when headset undocked

DIP 5: Audio Quality

- ☐ Best
Super Wideband calls, OfficeRunner II: Super Wideband media
Other DECT headsets: Fullband media
- ☐ Better
Wideband calls, OfficeRunner II: Super Wideband media
Other DECT headsets: Fullband media
- ☐ Good
Narrowband calls, Narrowband media

DIP 6: Audio limiter

- ☐ Off
- ☐ EU/US limiter
Compliant with Directive 2003/10/EC
- ☐ AU limiter
Compliant with Directive AS/ACIF G616:2006

DIP 7: Ringing volume


- ☐ Volume High
- ☐ Volume Low
- ☐ Volume Off

DIP 8: Ringtone


- ☐ Ringtone 1
- ☐ Ringtone 2
- ☐ Ringtone 3

WEARING THE HEADSET


12. Wearing with the headband

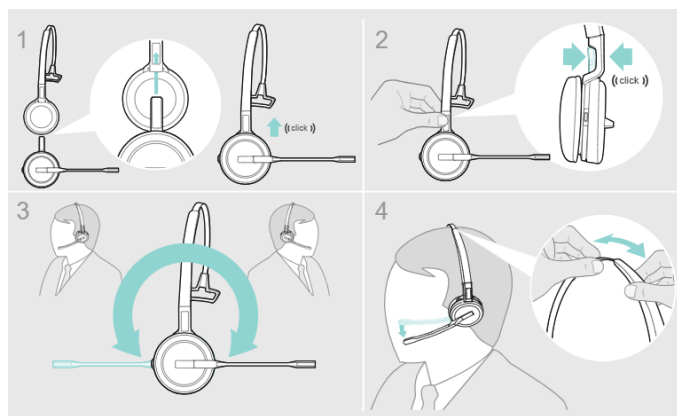


13. Wearing with the earhook

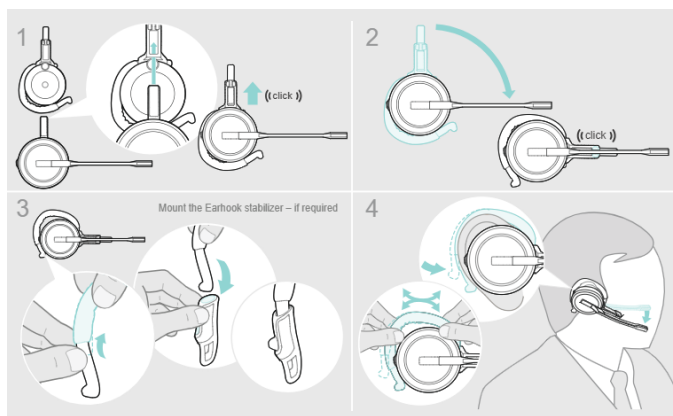


14. Wearing with the neckband

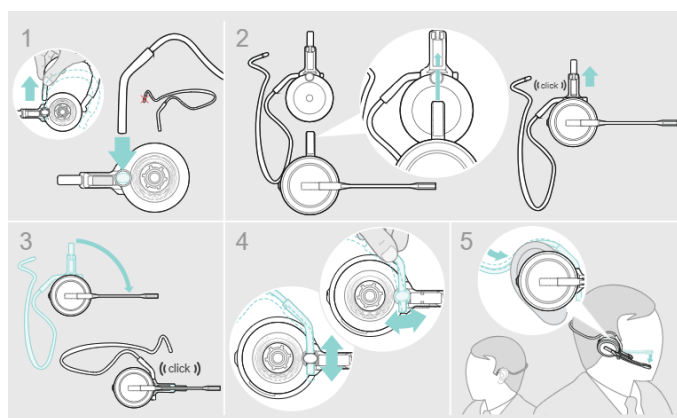

15. Adjusting the volume

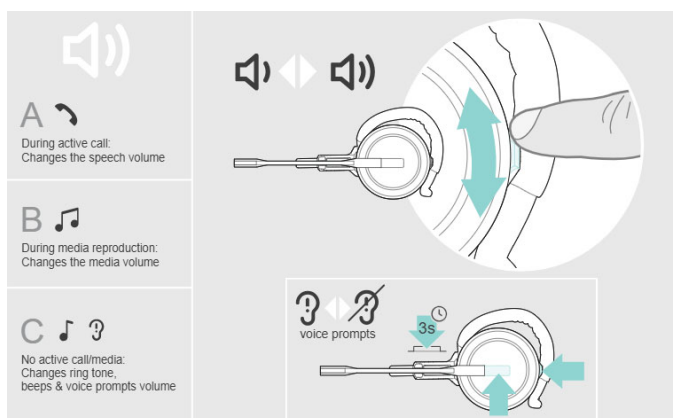


16. Muting the headset

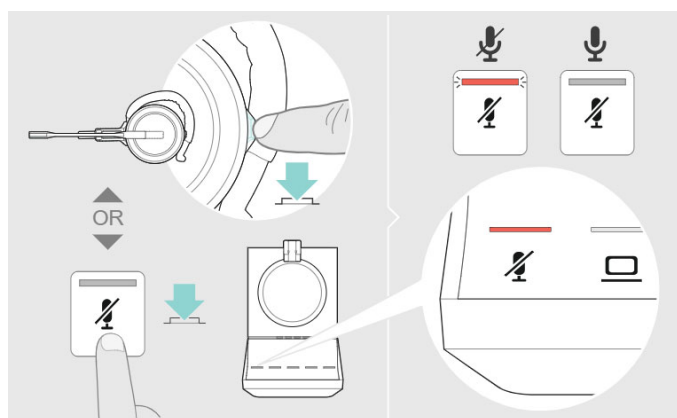


EVERYDAY CALLS


17. Preparing a call

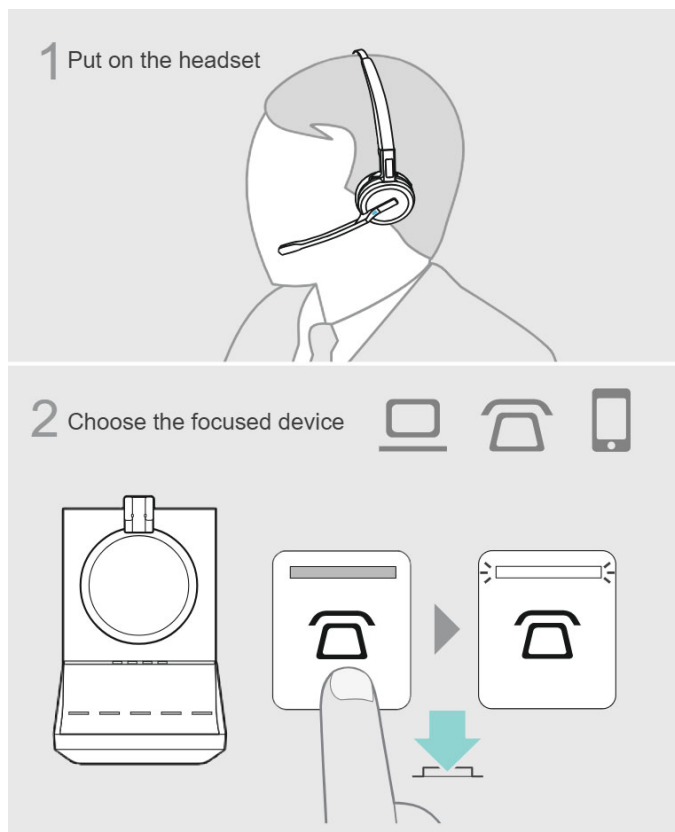


18. Making a call

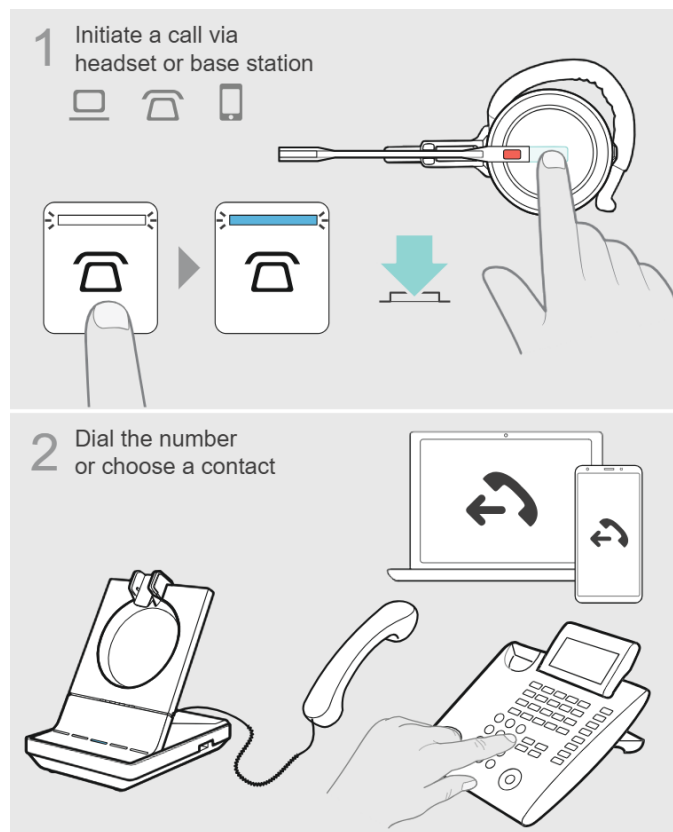

19. Accepting and rejecting calls

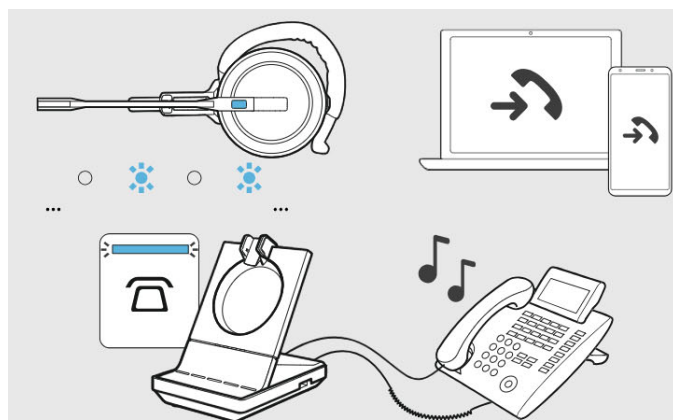


A Accept the call
via headset OR base station*

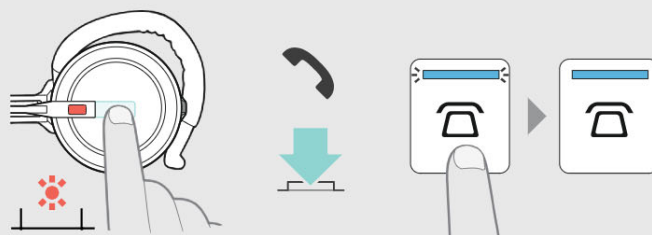


* For automatic call answering: see DIP switch settings

B Accept the call
on your device

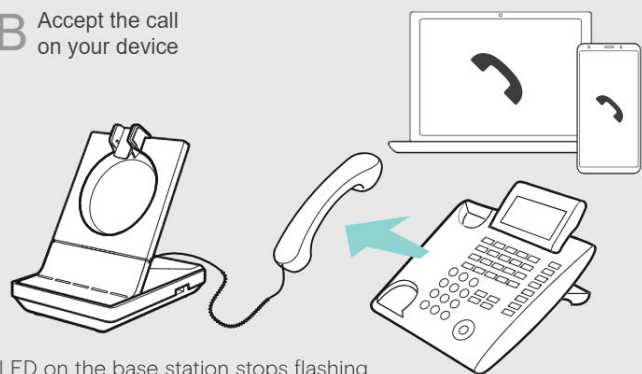


LED on the base station stops flashing

C Reject a call
via headset OR base station

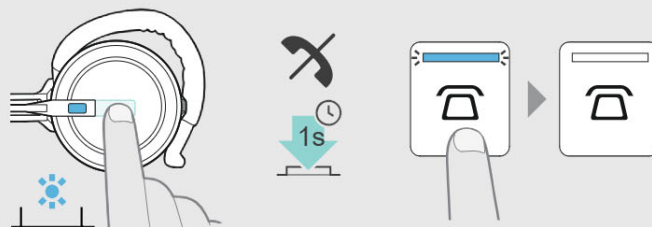


Electronic Hookswitch or Handset Lifter required.


20. Call control

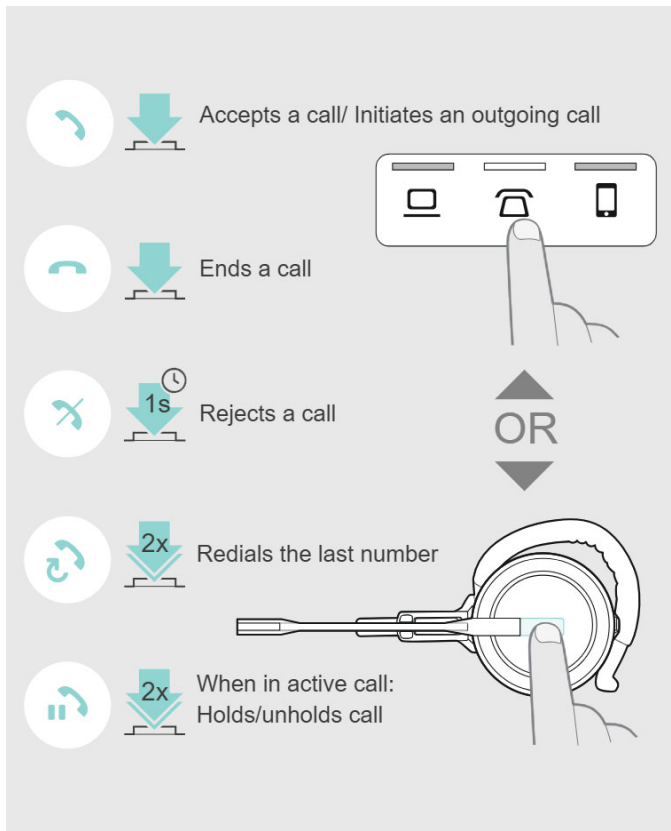


21. Remaining battery time

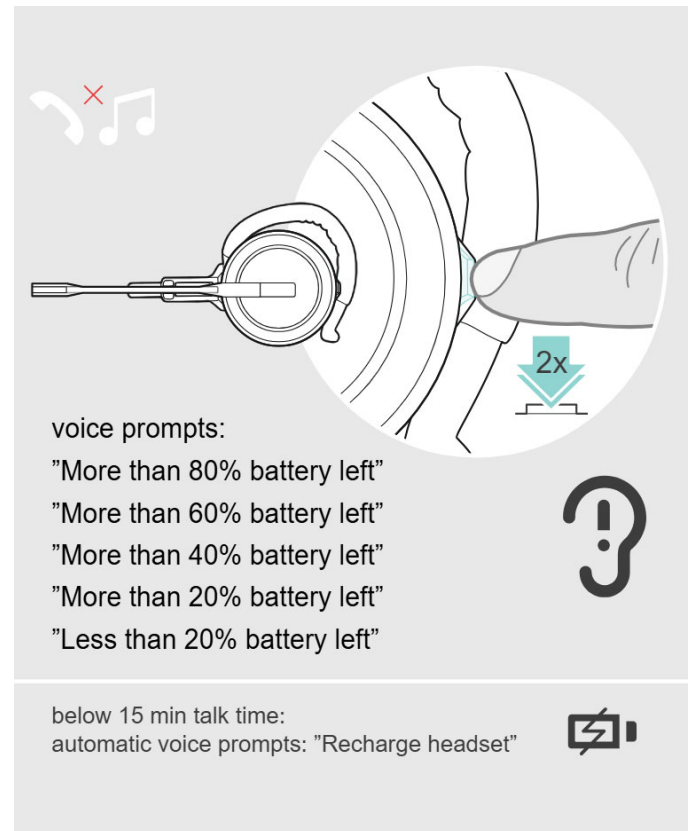


22. Managing multiple calls

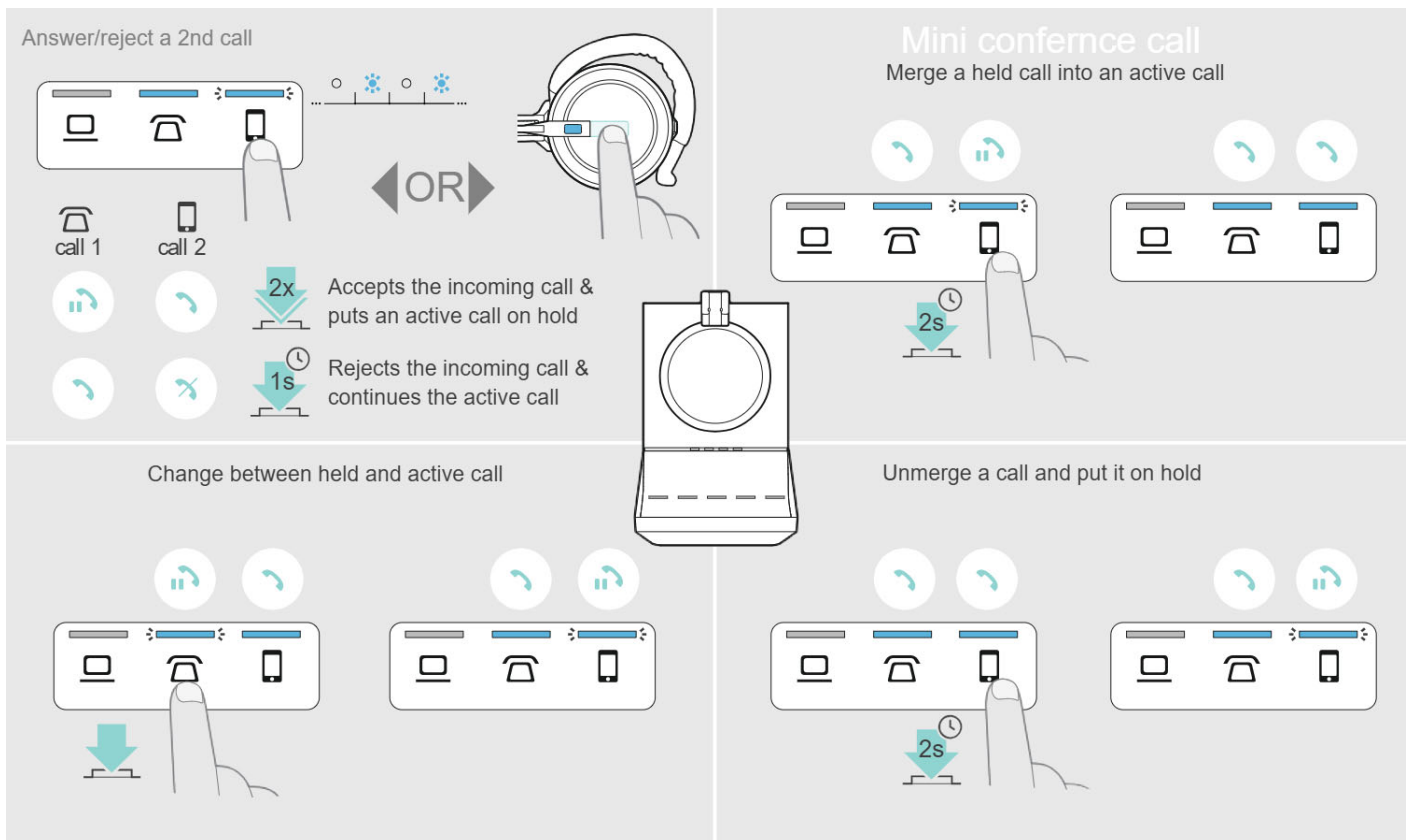


23. Preparing a conference

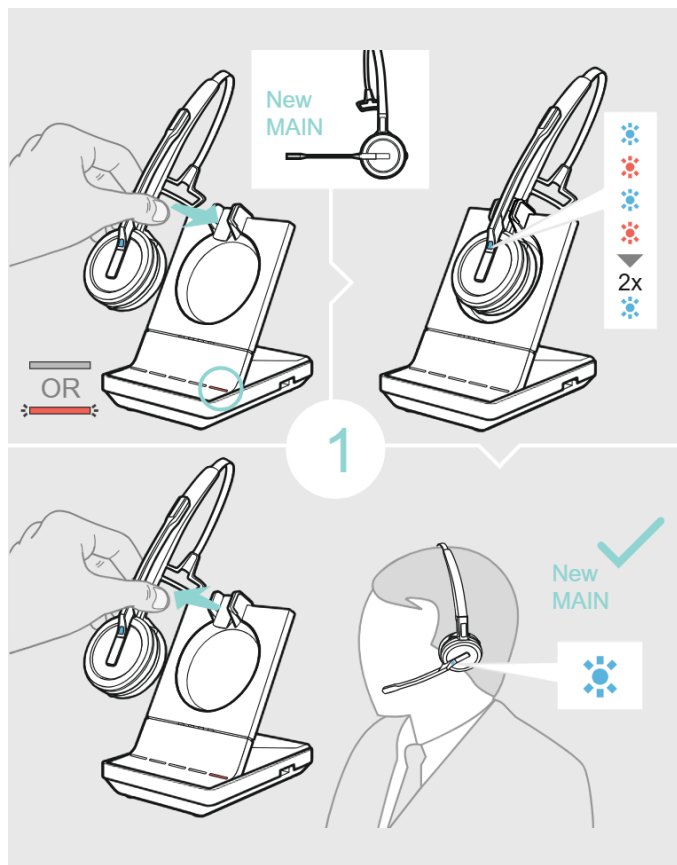

24. Conference with up to 3 guest DECT headsets

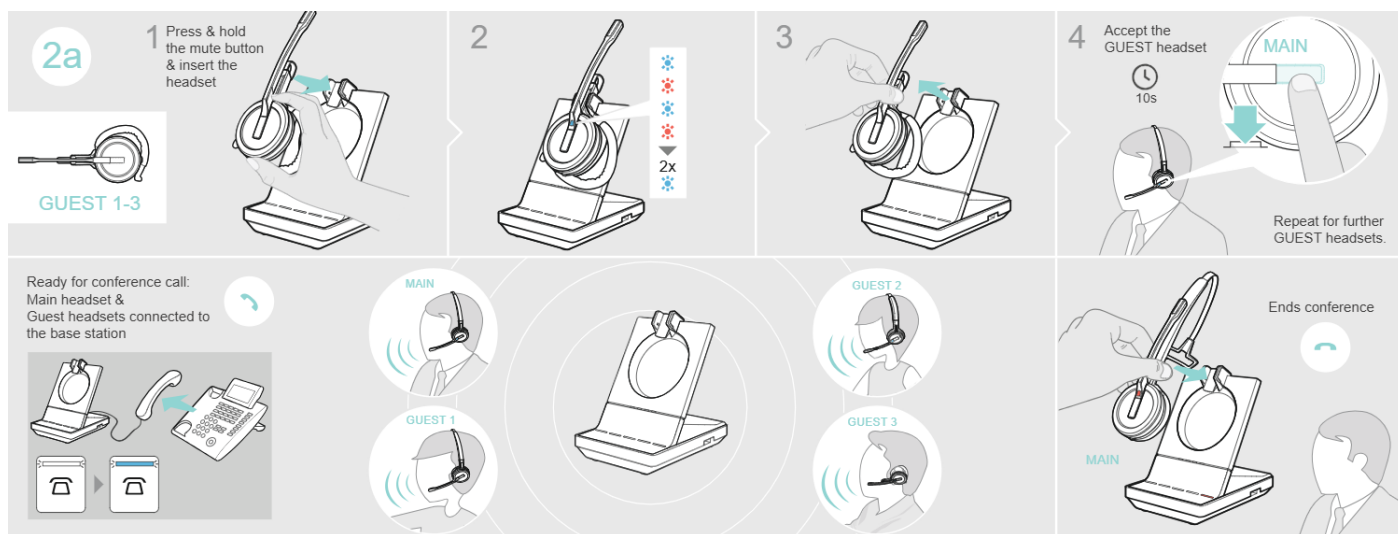

25. Activating Microsoft Teams

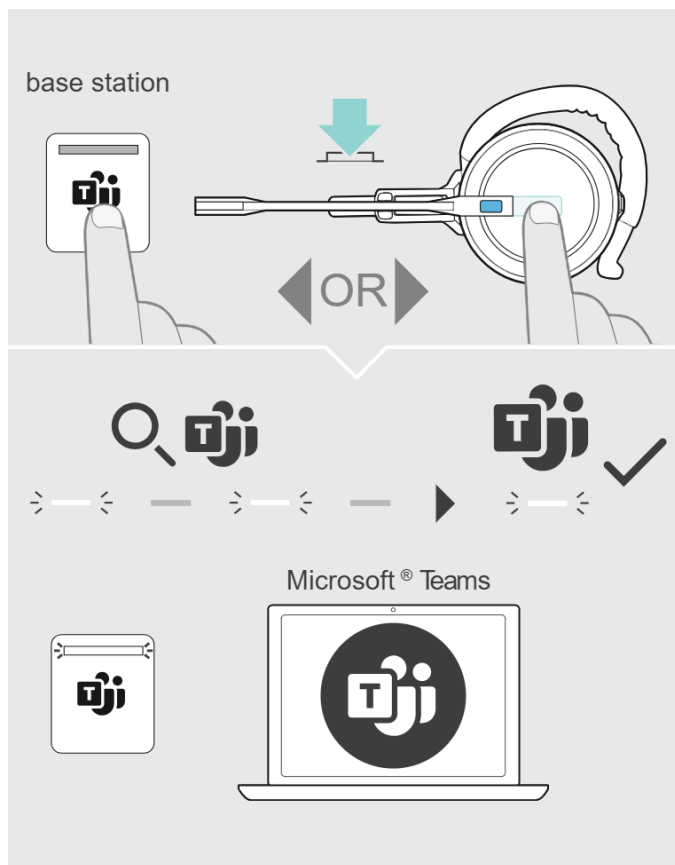

26. Audio playback

